



## NITRILE FOAM PALM WITH 3D MOISTUREVAP BREATHABILITY

Excellent resistance to abrasion. Outstanding durability and grip.

### FEATURES

- › Level 4 abrasion resistance
- › Superior comfort and dexterity
- › Anatomically engineered for maximum fit
- › Excellent grip in both wet and dry environments
- › An Oeko-Tex<sup>™</sup> certified product
- › Seamless nylon/spandex liner
- › Patented nitrile foam palm coating enhances protection
- › Sanitized<sup>®</sup> antimicrobial finish provides extra freshness
- › Light thermal protection up to 100°C for a short period
- › Touchscreen capabilities to allow usage with screen devices



### SUITABLE FOR

#### Typical Industries

- Automotive
- Logistics
- Maintenance
- Manufacturing
- Oil and Gas
- Utilities

#### Suitable Applications

- Assembly
- Goods Handling
- Light Fabrication
- Quality Inspection
- Warehousing

### CERTIFICATION

CAT II	EN 388:2016	EN407:2004	ANSI	ANSI	
UK CA	CE				
		4131X	X1XXXX	ABRASION	PUNCTURE

See overleaf for explanation



## PRODUCT INFORMATION

MATERIALS	LINER:	15 gauge nylon, spandex
	COATING:	Foam nitrile
COLOUR	Grey / Black	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

## ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SKY491	10 pairs per bag 120 pairs per case
8/M	SKY492	
9/L	SKY493	
10/XL	SKY494	
11/XXL	SKY495	


## RECOMMENDATIONS FOR USE

- **USE:** General handling glove. Not suitable for thermal, electrical or chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

## CERTIFICATION LEGENDS




## MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS\*

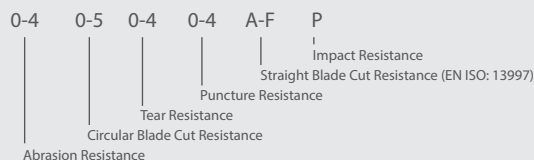

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



## HEAT AND FIRE EN 407

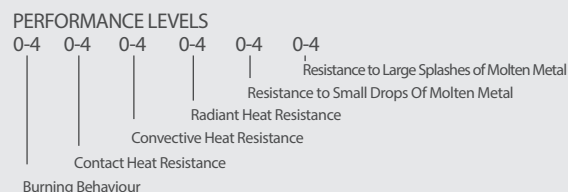

ANSI/ISEA 105-2016 ABRASION RATING CHART

Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

ANSI/ISEA PUNCTURE RESISTANCE

ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

## EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

E: [sales@globus.co.uk](mailto:sales@globus.co.uk)

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

## MIDDLE EAST AND AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

E: [gcc@globusgroup.com](mailto:gcc@globusgroup.com)

T: +971 4 882 9962

F: +971 4 882 9963

## GLOBUS AMERICAS

[www.globusgroup.com](http://www.globusgroup.com)

E: [americas@globusgroup.com](mailto:americas@globusgroup.com)



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES  
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

© 2022 Globus (Shetland) Ltd | SKY-DATA-ARIA-0922\_1